

電話による方法


1. スタート→プログラム→National Instruments→NI License Manager を起動します。




2. アクティブ化を行いたい製品を右クリックし、「アクティブ化...」を選択します。(製品名の横のアイコンが緑に埋まっている場合、既にアクティブ化されています。)



3. アクティブ化のダイアログが表示されましたら、「アクティブ化コードの取得に Web ブラウザ、Eメールクライアント、または FAX 番号を使用」を選択し、「次へ」をクリックします。

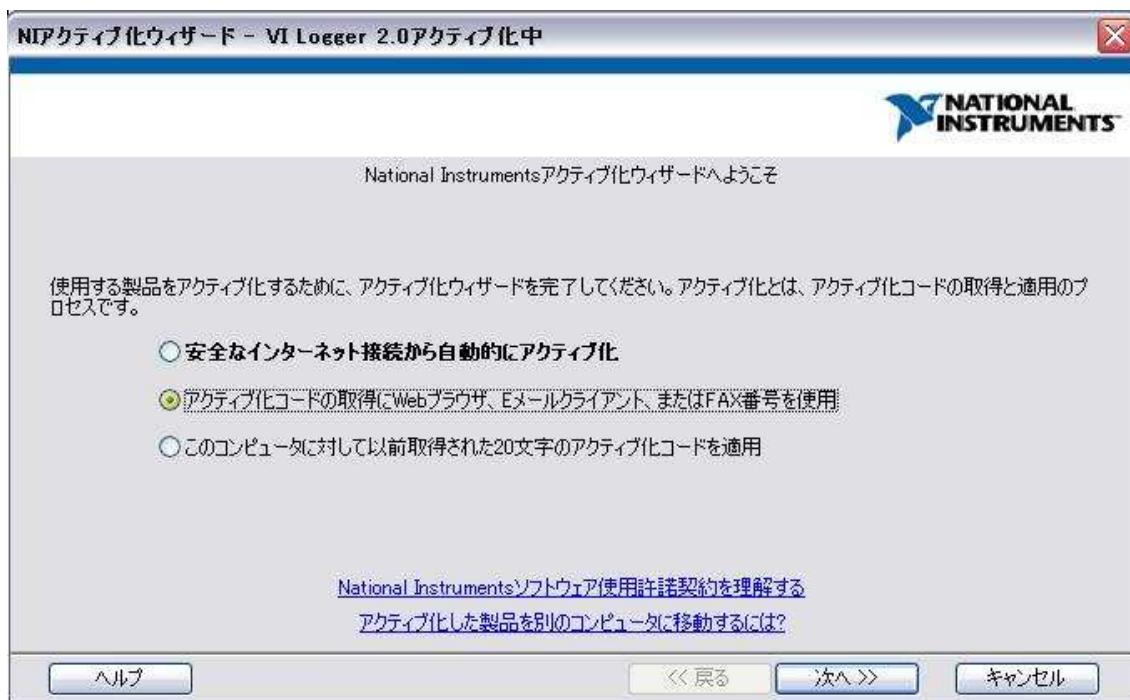

4. 連絡方法は「ナショナルインスツルメンツに電話で問い合わせる」を選択し、「次へ」をクリックします。

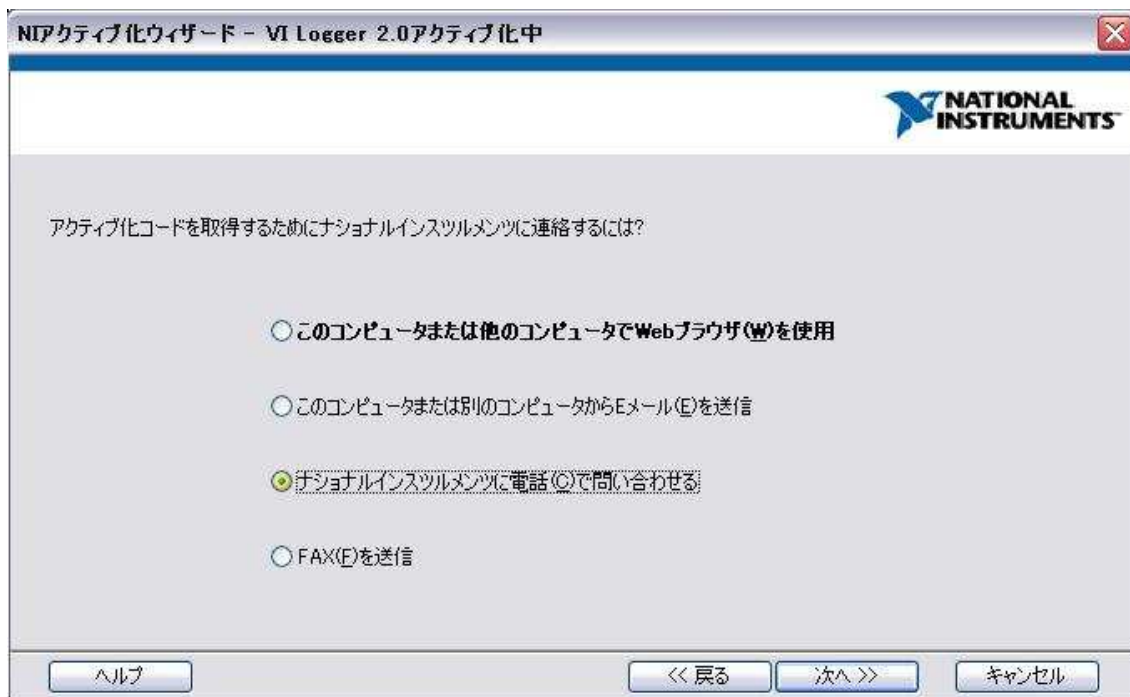

5. 製品のシリアル番号を入力し、「次へ」をクリックします。

NIアクティブ化ウィザード - VI Logger 2.0アクティブ化中

NATIONAL INSTRUMENTS

製品に同梱されているシリアル番号を入力します。

シリアル番号

シリアル番号は製品のCertificate of Ownershipまたはパッケージに記載されています。

この製品のシリアル番号が分からない場合、ここをクリックします。

シリアル番号がありません

ヘルプ << 戻る 次へ >> キャンセル

6. 以下のような情報が表示された状態で、日本ナショナルインスツルメンツ(0120-527196) までご連絡いただけます。ご連絡の際にはコンピュータ ID、シリアル番号、製品コードとお客様のお名前、会社名が必要となります。電話でアクティブ化コードの取得ができれば、「次へ」をクリックします。

NIアクティブ化ウィザード - VI Logger 2.0アクティブ化中

NATIONAL INSTRUMENTS

ナショナルインスツルメンツ製品アクティブ化電話システムを使用します。

米国とカナダ

その他の国

問題がありますか？ NI支社までお問い合わせください。

ナショナルインスツルメンツの電話によるアクティブ化では、以下の情報が必要です。

数値シリアル番号

数値製品コード

数値コンピュータID

この情報を保存

アクティブ化コードを入力する準備ができれば、「次へ」をクリックします。

ヘルプ << 戻る 次へ >> キャンセル

7. アクティブ化コードを入力します。以上で電話でのアクティブ化は終了です。

The screenshot shows a dialog box titled "NIアクティブ化ウィザード - VI Logger 2.0アクティブ化中" (NI Active Wizard - VI Logger 2.0 Activation). The National Instruments logo is in the top right corner. The main text reads "以下に20文字のアクティブ化コードを入力します。" (Enter a 20-character activation code below). An example is shown with the label "例:" followed by a greyed-out text box containing a long string of characters and a white text box with a cursor. At the bottom, there are four buttons: "ヘルプ" (Help), "<< 戻る" (Back), "次へ >>" (Next), and "キャンセル" (Cancel).